




## Eteng Company Limited



7#309, Longteng Building, National Economy  
Development District, Longteng South Road,  
Longyan City, Fujian 364000  
T:0086-597-2992225  
[info@etengcn.com](mailto:info@etengcn.com)

### Beryllium Copper EMI Finger strips


Our finger stock gasket can be used for closing a gap between two surface and provide the high EMI shielding effectiveness in enclosure applications where extremely low closure forces are required. The strips have high resistance to stress relaxation, and good corrosion resistance. They can be plated with many choice of metal finished to ensure their compatibility with any mating surface. They will not burn when affected by radiation. Then the designers of computers and electronics consumers regard it as an ideal product for EMI shielding over a broad frequency range.




Part number	A	B	C	D	E	T	L
001	9.40	3.57	6.35	0.56	7.90	0.06/0.08	406
004	15.20	5.80	9.50	0.80	12.70	0.06/0.10	610
011	7.11	2.81	4.78	0.46	5.80	0.06/0.08	406




Part number	A	B	C	D	E	T	L
002	11.27	9.40	6.35	0.56	8.18	0.08	406
005	18.20	15.20	9.50	0.80	13.25	0.10	406
012	8.90	7.11	4.78	0.46	6.48	0.08	406
009	18.60	19.80	9.50	1.00	12.39	0.1/0.127	610
041	29.43	10.44	12.70	1.00	19.37	0.18	610

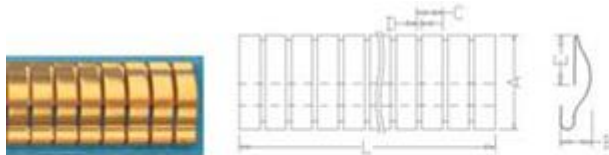


Part numbe	A	B	C	D	E	T	L
050	15.24	3.70	3.18	0.64	8.30	0.06	406
702	11.43	2.00	3.18	0.64	6.00	0.08	406

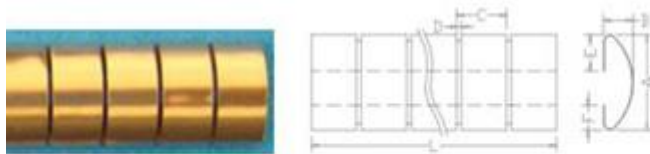


Part numbe	A	B	C	D	E	T	L	F
058	8.90	2.80	4.75	0.46	3.65	0.05/0.08	406	2.3

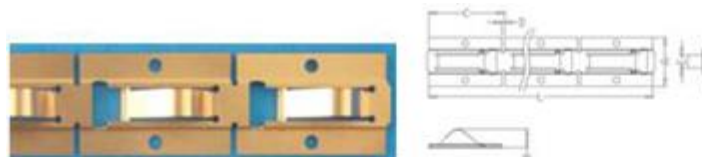


Part numbe	A	B	C	D	E	T	L
075	20.30	7.00	31.75	1.25	5.38	0.127	476.25

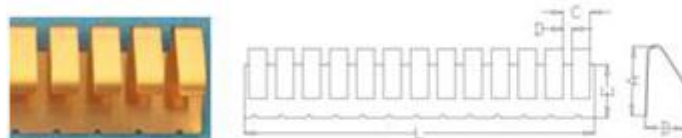



Part numbe	A	B	C	D	E	T	L
083	12.20	7.10	4.78	1.63	9.40	0.15	406

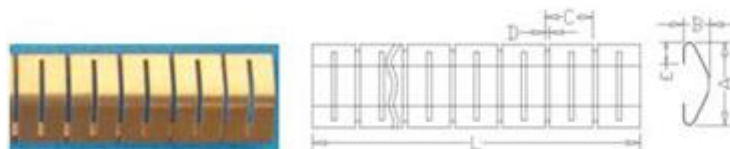


Part numbe	A	B	C	D	E	T	L
125	8.25	2.59	4.73	0.46	2.16	0.08/0.05	406





Part numbe	A	B	C	D	E	T	L
003	13.00	3.58	6.35	0.56	3.60	0.08	406
006	19.30	5.83	9.50	0.80	5.00	0.10	406
013	9.65	3.04	4.78	0.46	2.78	0.08	406
014	6.35	2.02	4.78	0.46	1.98	0.06/0.08	406




Part numbe	A	B	C	D	E	T	L
007	27.70	6.37	9.50	1.00	7.49	0.08/0.1/0.127	406
040	41.40	10.40	12.70	1.00	9.50	0.18	610




Part numbe	A	B	C	D	E	T	L
015	9.20	5.56	6.35	1.00	8.60	0.10	406




Part numbe	A	B	C	D	E	T	L
008	19.80	6.40	9.50	1.00	13.50	0.08/0.1/0.127	610
010	17.19	7.87	9.50	1.00	13.50	0.10	610
028	28.70	10.42	12.70	1.00	19.80	0.18	610

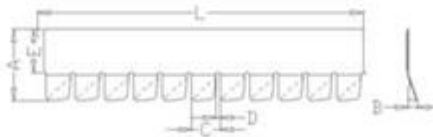


Part numbe	A	B	C	D	E	T	L
017	5.85	0.80	2.40	0.38	3.75	0.08	7.6M
019	8.64	1.80	4.19	0.38	4.57	0.08	7.6M




Part numbe	A	B	C	D	E	T	L
-018	4.86	2.03	2.40	0.38	4.06	0.08	7.6M
-020	6.90	3.80	4.19	0.38	5.10	0.08	7.6M




Part numbe	A	B	C	D	E	T	L
021	12.58	1.80	4.19	0.16	4.80	0.08	610




Part numbe	A	B	C	D	E	T	L
023	9.50	3.80	5.20	0.70	2.00	0.08	406
-062	8.10	1.86	4.75	0.46	1.80	0.05	406
-063	15.24	5.60	7.16	0.81	3.30	0.127	406
181	8.13	2.79	4.75	0.46	1.96	0.06	406
182	8.13	2.79	4.75	0.46	1.96	0.08	406

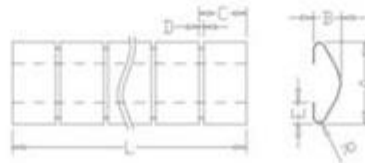



Part numbe	A	B	C	D	E	T	L	R
-025	8.13	2.79	4.75	0.50	2.16	0.08	406	0.51
105	8.13	2.79	4.75	0.50	2.16	0.10	406	
120	8.13	2.79	4.75	0.50	2.16	0.05	406	
121	8.13	2.79	4.75	0.50	2.16	0.06	406	
-122	8.13	2.79	4.75	0.50	2.16	0.05	406	0.89
043	7.87	3.05	6.35	0.50	2.28	0.08	406	
044	9.40	3.30	6.35	0.64	2.16	0.08/0.05	406	
045	15.24	5.49	7.16	0.81	3.56	0.10	406	
110	8.13	3.20	4.75	0.50	2.16	0.08	406	
111	7.60	3.30	4.85	0.55	2.00	0.08	14	

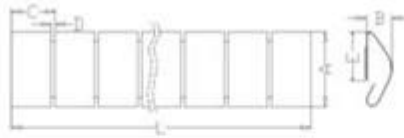

Part numbe	A	B	C	D	E	T	L
026	8.10	2.80	4.75	0.45	5.30	0.08/0.08	406
047	15.20	5.60	9.53	0.81	7.10	0.10/0.08	406
140	15.20	5.60	9.53	0.81	7.10	0.05	406
160	20.32	8.13	9.53	0.81	11.00	0.10	406





Part numbe	A	B	C	D	E	T	L
027	11.43	2.60	3.18	0.60	5.90	0.10	406
048	15.24	3.05	3.18	0.64	8.30	0.08	406
049	15.24	3.05	3.18	0.64	8.30	0.06	406

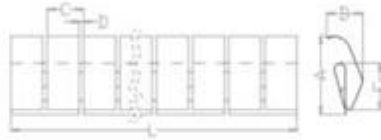



Part numbe	A	B	C	D	E	T	L
037	13.80	6.35	6.35	0.76	8.23	0.10	406




Part numbe	A	B	C	D	E	T	L
039	8.37	2.15	4.62	1.20	5.44	0.127	406
600	7.96	3.30	4.62	1.18	4.90	0.10	406
601	8.21	2.66	4.62	1.18	4.90	0.10	406

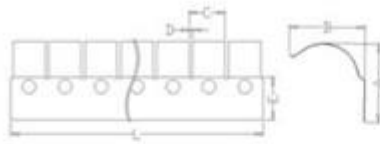


Part numbe	A	B	C	D	E	T	L
066	20.54	19.41	9.50	1.00	11.20	0.127	610



Part numbe	A	B	C	D	E	T	L
067	26.90	7.42	9.50	1.00	7.40	0.127	406




Part numbe	A	B	C	D	E	T	L
071	3.00	1.63	7.11	0.51		0.08	304

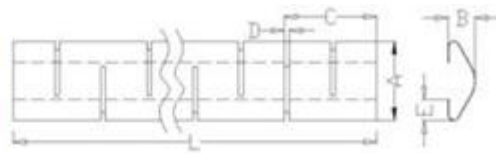






Part numbe	A	B	C	D	E	T	L
128	8.13	2.79	9.50	0.46	2.16	0.05	228



Part numbe	A	B	C	D	E	T	L
150	10.16	3.50	6.35	0.80	4.90	0.08	406

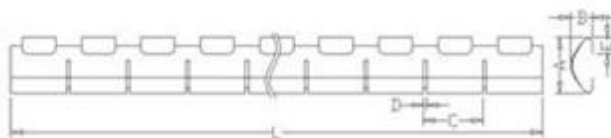

Part numbe	A	B	C	D	E	T	L
183	7.50	2.90	8.00	0.45	2.16	0.08	406

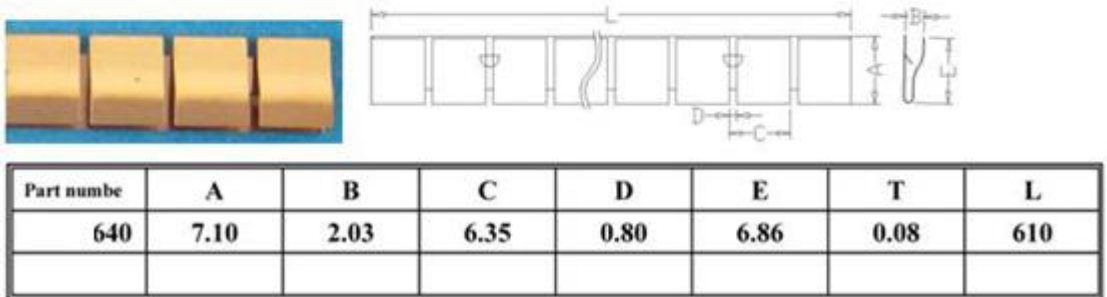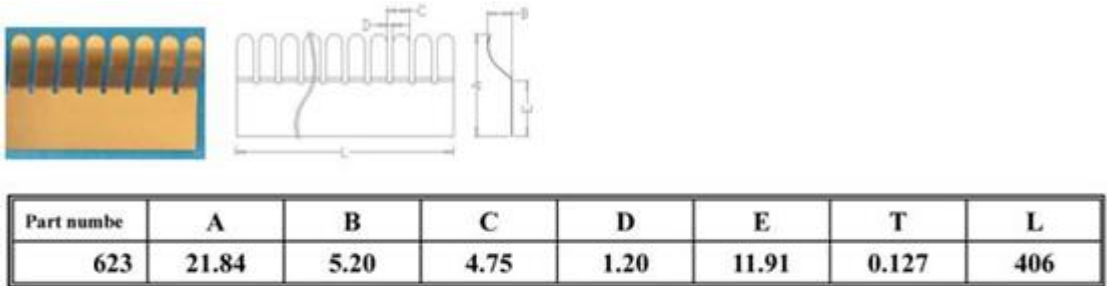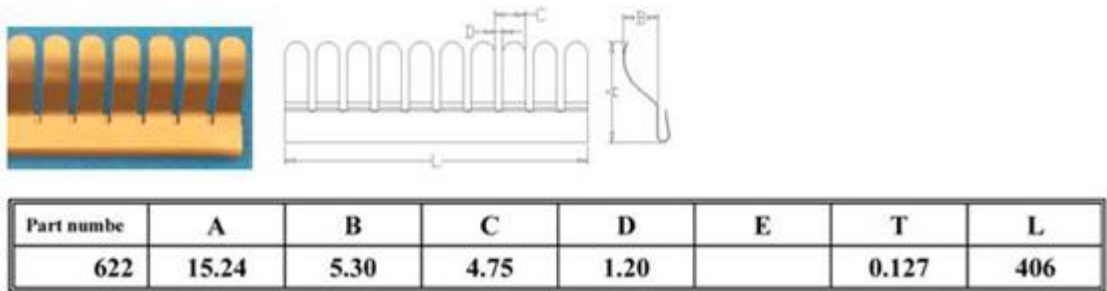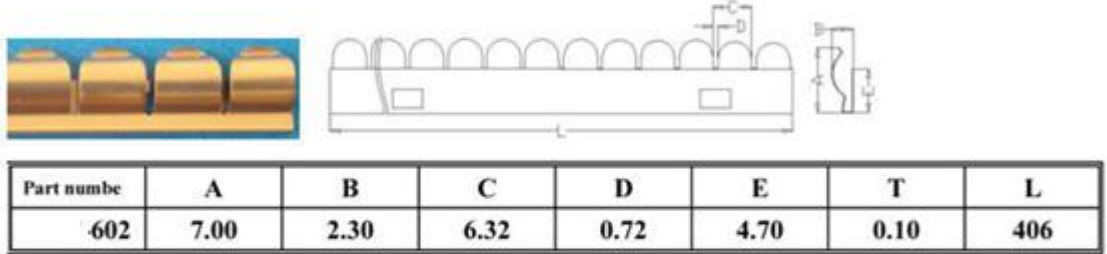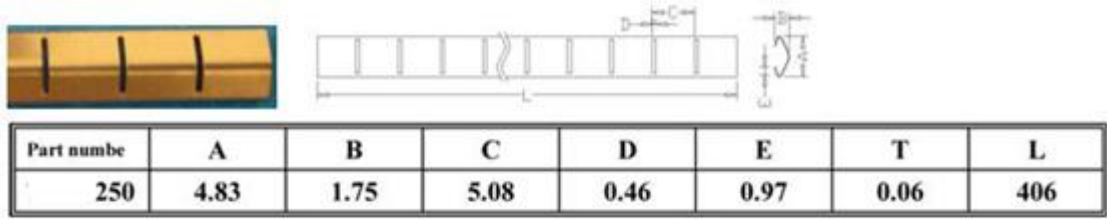

**Shielding effectiveness(25% compression)**

	Magnet field	Electric field	Flat wave
Standard finger strip	100dB	100dB	90dB