





EMI Shielding Gasket

Structure

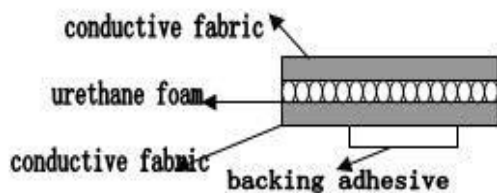

Performances:

Frequency	Attenuation
30 MHz	90
100 MHz	>100
500 MHz	>100
1 GHz	>100
10 GHz	110
Surface resistivity:	Nickel/Copper < 0.05 ohms/square
Abrasion resistance:	Excellent
Compression set:	< 10% (typical)
Temperature range:	-40 to +70° (typical)



O shape please contact us if you need other size.

Part No	W(mm/in)	H(mm/in)	Part No	W(mm/in)	H(mm/in)
PM-O-2-2	2(0.0787)	2(0.0787)	PM-O-5-5	5(0.1969)	5(0.1969)
PM-O-2.7-2.7	2.7(0.1063)	2.7(0.1063)	PM-O-9.6-9.6	9.6(0.378)	9.6(0.378)
PM-O-3-3	3(0.1181)	3(0.1181)	PM-O-10-10	10(0.3937)	10(0.3937)
PM-O-4-4	4(0.1575)	4(0.1575)			