



EMI Shielding Gasket

Structure

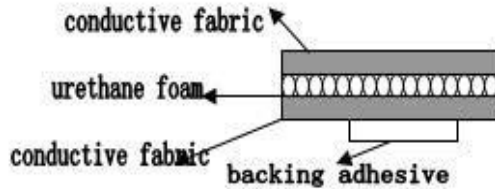

Performances:

Frequency	Attenuation
30 MHz	90
100 MHz	>100
500 MHz	>100
1 GHz	>100
10 GHz	110
Surface resistivity:	Nickel/Copper < 0.05 ohms/square
Abrasion resistance:	Excellent
Compression set:	< 10% (typical)
Temperature range:	-40 to +70° (typical)



Rectangle and square shape, please contact us if you need other size.

Part No	W(mm/in)	H(mm/in)	Part No	W(mm/in)	H(mm/in)
PM-R-1.8-0.8	1.8(0.0709)	0.8(0.0315)	PM-R-6-1.5	6(0.2362)	1.5(0.0591)
PM-R-1.75-1.5	1.75(0.0689)	1.5(0.0591)	PM-R-6.35-0.5	6.35(0.25)	0.5(0.0197)
PM-R-1.8-4	1.8(0.0709)	4(0.1575)	PM-R-6.5-1.5	6.5(0.2559)	1.5(0.0591)
PM-R-1.8-6.5	1.8(0.0709)	6.5(0.2559)	PM-R-6.78-0.5	6.78(0.2669)	0.5(0.0197)
PM-R-2-0.5	2(0.0787)	0.5(0.0197)	PM-R-7-0.5	7(0.2756)	0.5(0.0197)
PM-R-2.6-1	2.6(0.1024)	1(0.0394)	PM-R-7-10.5	7(0.2756)	10.5(0.4134)
PM-R-2.6-0.5	2.6(0.1024)	0.5(0.0197)	PM-R-7.15-0.3	7.15(0.2815)	0.3(0.0118)
PM-R-2.8-6.5	2.8(0.1102)	6.5(0.2559)	PM-R-7.5-3	7.5(0.2953)	3(0.1181)
PM-R-2.8-2	2.8(0.1102)	2(0.0787)	PM-R-8-1.75	8(0.315)	1.75(0.0689)
PM-R-3-0.3	3(0.1181)	0.3(0.0118)	PM-R-8-3.5	8(0.315)	3.5(0.1378)
PM-R-3-1	3(0.1181)	1(0.0394)	PM-R-8-8	8(0.315)	8(0.315)
PM-R-3.21-5.65	3.21(0.1264)	5.65(0.224)	PM-R-8.7-1.5	8.7(0.3425)	1.5(0.0591)
PM-R-3-3	3(0.1181)	3(0.1181)	PM-R-9-0.5	9(0.3543)	0.5(0.0197)
PM-R-3.4-1	3.4(0.1339)	1(0.0394)	PM-R-9-20	9(0.3543)	20(0.7874)
PM-R-3.56-0.4	3.56(0.1402)	0.4(0.0157)	PM-R-9-3.6	9(0.3543)	3.6(0.1417)
PM-R-3-2	3(0.1181)	2(0.0787)	PM-R-9-6.5	9(0.3543)	6.5(0.2559)



PM-R-3.5-3.5	3.5(0.1378)	3.5(0.1378)	PM-R-9-9	9(0.3543)	9(0.3543)
PM-R-4-0.5	4(0.1575)	0.5(0.0197)	PM-R-9.5-1.5	9.5(0.374)	1.5(0.0591)
PM-R-4-1	4(0.1575)	1(0.0394)	PM-R-9.5-9.5	9.5(0.374)	9.5(0.374)
PM-R-4-8	4(0.1575)	8(0.315)	PM-R-9.8-0.3	9.8(0.3858)	0.3(0.0118)
PM-R-5-1	5(0.1969)	1.5(0.0591)	PM-R-10-0.3	10(0.3937)	0.3(0.0118)
PM-R-5.1-2.5	5.1(0.2008)	2.5(0.0984)	PM-R-10-1	10(0.3937)	1(0.0394)
PM-R-5-3	5(0.1969)	3(0.1181)	PM-R-10-4.5	10(0.3937)	4.5(0.1772)
PM-R-5.4-1	5.4(0.2126)	1(0.0394)	PM-R-10-5	10(0.3937)	5(0.1969)
PM-R-5.6-0.4	5.6(0.2205)	0.4(0.0157)	PM-R-10-15	10(0.3937)	15(0.5906)
PM-R-6-0.3	6(0.2362)	0.3(0.0118)	PM-R-10.4-0.5	10.4(0.4094)	0.5(0.0197)
PM-R-6-0.5	6(0.2362)	0.5(0.0197)	PM-R-11.2-0.4	11.2(0.4409)	0.4(0.0157)
PM-R-12-0.3	12(0.4724)	0.3(0.0118)	PM-R-17-1.5	17(0.6693)	1.5(0.0591)
PM-R-12-5.5	12(0.4724)	5.5(0.2165)	PM-R-20-0.5	20(0.7874)	0.5(0.0197)
PM-R-12-12	12(0.4724)	12(0.4724)	PM-R-20-2	20(0.7874)	2(0.0787)
PM-R-12-13.5	12(0.4724)	13.5(0.5315)	PM-R-23-1	23(0.9055)	1(0.0394)
PM-R-12.7-12.7	12.7(0.5)	12.7(0.5)	PM-R-25.4-3.2	25.4(1)	3.2(0.126)
PM-R-13-0.4	13(0.5118)	0.4(0.0157)	PM-R-30-0.5	30(1.1811)	0.3(0.0118)
PM-R-13-13	13(0.5118)	13(0.5118)	PM-R-32-1	32(1.2598)	1(0.0394)
PM-R-13.5-0.3	13.5(0.5315)	0.3(0.0118)	PM-R-35-0.5	35(1.378)	0.5(0.0197)
PM-R-14-1.5	14(0.5512)	1.5(0.0591)	PM-R-40-0.8	40(1.5748)	0.8(0.0315)
PM-R-14-14	14(0.5512)	14(0.5512)	PM-R-100-3	100(3.9737)	3(0.1181)
PM-R-15-1	15(0.5906)	1(0.0394)	PM-R-41.52-0.4	41.52(1.6346)	0.4(0.0157)
PM-R-15-15	15(0.5906)	15(0.5906)	PM-R-46-3	46(1.811)	3(0.1181)
PM-R-15-20	15(0.5906)	20(0.7874)	PM-R-12-3.4	12(0.4724)	34(1.3386)
PM-R-15.2-6.4	15.2(0.5984)	6.4(0.252)	PM-R-15-30	15(0.5906)	30(1.1811)
PM-R-15.6-0.7	15.6(0.6142)	0.7(0.0276)	PM-R-20-35	20(0.7874)	35(1.378)
PM-R-15.7-3.2	15.7(0.6181)	3.2(0.126)	PM-R-40-40	40(1.5748)	40(1.5748)
PM-R-16-0.5	16(0.6299)	0.5(0.0197)	PM-R-50-0.5	50(1.9685)	0.5(0.0197)
PM-R-16-10	16(0.6299)	10(0.3937)	PM-R-40-2.5	40(1.5748)	2.5(0.0984)