


EMI Shielding Gasket


Structure

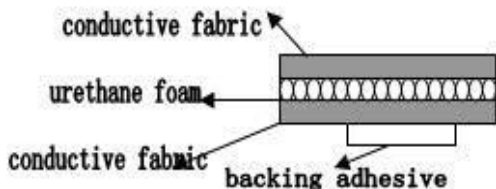

Performances:

Frequency	Attenuation
30 MHz	90
100 MHz	>100
500 MHz	>100
1 GHz	>100
10 GHz	110
Surface resistivity:	Nickel/Copper < 0.05 ohms/square
Abrasion resistance:	Excellent
Compression set:	< 10% (typical)
Temperature range:	-40 to +70° (typical)

For such as below shape, please provide the details drawing if there is some require for the angles or others

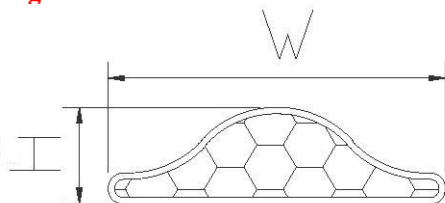

T shape please contact us if you need other size.

Part No	W(mm/in)	H(mm/in)	Part No	W(mm/in)	H(mm/in)
PM-B-10-2.27	10(0.3937)	2.27(0.0894)	PM-B-17-2.5	17(0.6693)	2.5(0.0984)
PM-B-7.8-2.4	7.8(0.3071)	2.4(0.0945)	PM-B-7.1-2.67	7.1(0.2795)	2.67(0.1051)
PM-B-4.3-2.7	4.3(0.16930)	2.7(0.1063)	PM-B-4.6-1.8	4.6(0.1811)	1.8(0.0709)
PM-B-10.16-3	10.16(0.4)	3(0.1181)	PM-B-7.8-2.4	7.8(0.3071)	2.4(0.0945)
PM-B-6.5-3.3	6.5(0.2559)	3.3(0.1299)	PM-B-10-2.27	10(0.3937)	2.27(0.0894)
PM-B-8-2.29	8(0.315)	2.29(0.902)	PM-B-17-15.5	17(0.6693)	15.5(0.6102)