





ET-6030

EMI Conductive Aluminum foil Shielding Tape

Structure

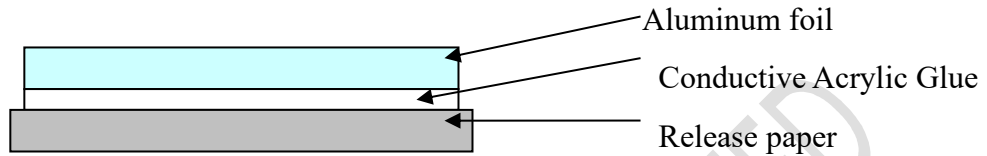

db

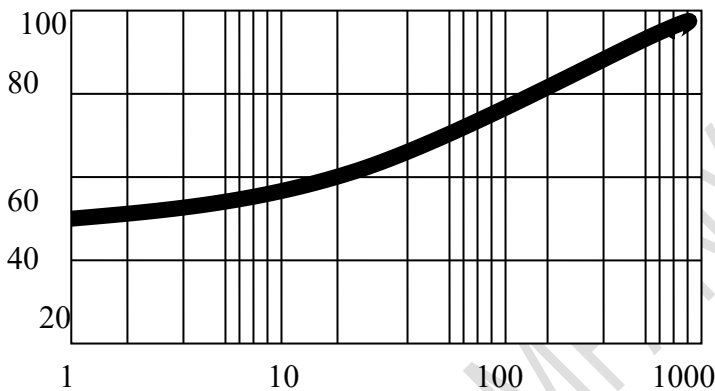

Technical Data

| | | |
|-------------------------------------|-----------------|--------------------|
| Product Number | ET-6030 | |
| Material Thickness | 0.03 (+/-0.005) | mm |
| Tensile Strength, Rm | 194.67-201.07 | N/m m ² |
| Elongation Lo=100mm | 16.84-17.77 | % |
| Vickers Hardness0.3/15 | 42 | |
| Total Thickness | 0.06 (+/-0.005) | mm |
| Adhesive Thickness | 0.03 (+/-0.005) | mm |
| Release Liner | 0.11~0.15 | mm |
| Peel Adhesion (180°/PST#1) | > 1.1 | Kg/in |
| Holding Power (178°/PST#7) | >48 | Hr |
| Volume Resistivity (ohm/in2) | <0.09 | Ω |
| Temperature | 5~130 | °C |

How to use

1. Keep the surface clear and dry.
2. Adhere to the correct place; can not peel off and adhere again and again.
3. Keep steady for 24 hours, do not move it after just adhere.

Application fields

PDA, PDP, LCD monitor, portable PC, mobile, duplicating machine and other electronic equipment which need EMI Shielding.

Storage

1. Temp indoor: $23 \pm 5^{\circ} \text{C}$
2. Dry place.
3. Valid date: one year

Package:

| | |
|---------------|--|
| Core | Paper core, white plastic core, green plastic core Diameter of core include 30mm, 38mm and 76mm |
| Length | 5meters, 20meters, 33 meters, 50meters (supply as client's requirement) |
| Width | Various width, Min. width is 5mm, Max. width of copper foil is 500mm |
| Package | Single shrink package by OPP film if requirement. |
| Other service | Die-cutted as drawing |

ETENG COMPANY LIMITED