




EMI Shielding Gasket


Structure

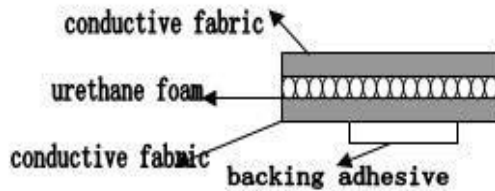

Performances:

| | |
|----------------------|-------------------------------------|
| Frequency | Attenuation |
| 30 MHz | 90 |
| 100 MHz | >100 |
| 500 MHz | >100 |
| 1 GHz | >100 |
| 10 GHz | 110 |
| Surface resistivity: | Nickel/Copper < 0.05 ohms/square |
| Abrasion resistance: | Excellent |
| Compression set: | < 10% (typical) |
| Temperature range: | -40 to +70° (typical) |

For such as below shape, please provide the details drawing if there is some require for the angles or others



knife shape please contact us if you need other size.

| Part No | W(mm/in) | H(mm/in) | Part No | W(mm/in) | H(mm/in) |
|------------|-------------|------------|-----------|----------|------------|
| PM-K-11-09 | 11.3(0.445) | 0.9(0.035) | PM-k-8-09 | 8(0.315) | 0.9(0.035) |