




EMI Shielding Gasket


Structure

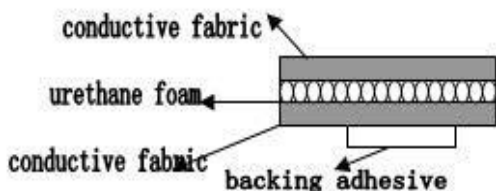

Performances:

Frequency	Attenuation
30 MHz	90
100 MHz	>100
500 MHz	>100
1 GHz	>100
10 GHz	110
Surface resistivity:	Nickel/Copper < 0.05 ohms/square
Abrasion resistance:	Excellent
Compression set:	< 10% (typical)
Temperature range:	-40 to +70° (typical)

For such as below shape, please provide the details drawing if there is some require for the angles or others

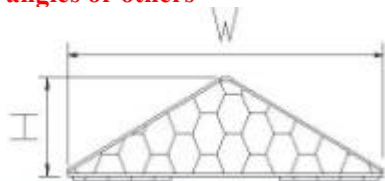

Triangle shape please contact us if you need other size

Part No	W(mm/in)	H(mm/in)	Part No	W(mm/in)	H(mm/in)
PM-T-6.2-2.5	6.2(0.2441)	2.5(0.0984)	PM-T-10-3	10(0.3937)	3(0.1181)
PM-T-7.55-2.5	7.55(0.2972)	2.5(0.0984)	PM-T-12.7-2	12.7(0.5)	2(0.0787)
PM-T-9.6-1.5	9.6(0.378)	1.5(0.0591)	PM-T-12.7-3	12.7(0.5)	3(0.1181)
PM-T-9.9-3.56	9.9(0.3898)	3.56(0.1402)	PM-T-14.22-4.06	14.22(0.5598)	4.06(0.1598)
PM-T-10-2.5	10(0.3937)	2.5(0.0984)	PM-T-18.29-4.06	18.29(0.7201)	4.06(0.1598)