



Eteng Electronics Co Limited

7#309,Longteng Blvd, National Economy

Development District ,Longteng South Road,


Longyan City, Fujian,P.R China 364000

T:0086-597-2992225

info@etengcn.com

Double side PET tape

Structure

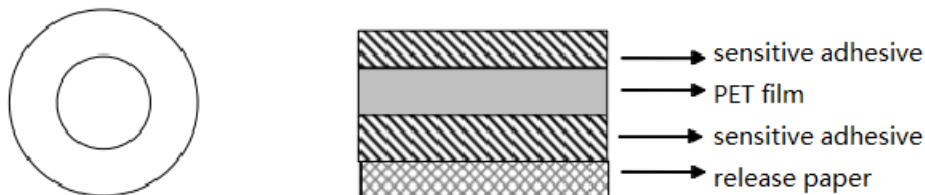

Specification

Width of tape	205 \pm 3 μ m
thickness	12 μ m+PET
glue	Acrylic pressure sensitive adhesive
Color of glue	clear
size	1.24mm*100m
Release paper	Pink MOPP film
adhesion	\geq 2.5Kg/ 25mmn
initial adhesion	6-7#
Permanent adhesion	6.25cm3,1Kg, 72H+
Temperature	100°C

Application

This tape has good adhesive force but also has excellent die cutting processing, suitable for automobile, decoration, electronic appliances, digital, hardware and other industries of accessory paste and application.

Use and preservation:

- 1, use to keep the paste surface clean and dry, paste to smooth and even.
- 2, the ideal use environment is in the temperature of 21°C-38°C, humidity 50%-85% of the environment, not recommended the temperature is lower than 10° C or the humidity is lower than 30%.
- 3, the products should be stored in the temperature of 21°C-25°C, humidity 60%-70% indoor, save the product packaging avoid direct sunlight.

Other Thickness

Number	Material	Thick(mm)	Color	Peel adhesion(N\25MM)	Temp
983	PET	0.03	clear	\geq 9	100~150°C
972	PET	0.05	clear	\geq 8	100~150°C
980	PET	0.08	clear	\geq 10	100~150°C
982	PET	0.1	clear	\geq 12	100~150°C
928	PET	0.125	clear	\geq 14	100~150°C
967	PET	0.16	clear	\geq 16	100~150°C
965	PET	0.205	clear	\geq 18	100~150°C
970	PVC	0.245	white	\geq 18	100~150°C
968	PVC	0.325	white	\geq 20	100~150°C



www.etengc.com